



PRODUCT INFORMATION AND SAFETY

- Manufacture from 2.0mm Stainless Steel or Powder-Coated Steel
- Available in sizes 1200, 600, 500, 300
- Available with either blue light, switch or EMG
- Multiple mounting options – surface, corner and recessed
- IK10 Impacted Tested to IEC 62262
- 5 Year Warranty


MODEL TABLE			
Model No.	Mass(approx.)	Dimensions	Rating
Dura-Lite 1200 <small>(Surface Mount)</small>	10.80kg	1200mm x 260mm x 80mm	230-240V ~ 50hz 60 watts
Dura-Lite 600 <small>(Surface Mount)</small>	6.50kg	590mm x 260mm x 90mm	230-240V ~ 50hz 30 watts
Dura-Lite 500 <small>(Surface Mount)</small>	5.40kg	470mm x 260mm x 120mm	230-240V ~ 50hz 6 watts
Dura-Lite 300 <small>(Surface Mount)</small>	2.50kg	310mm x 260mm x 70mm	230-240V ~ 50hz 6 watts
Dura-Lite 1200 <small>(Corner Mount)</small>	10.50kg	1360mm x 160mm x 110mm	230-240V ~ 50hz 60 watts
Dura-Lite 600 <small>(Corner Mount)</small>	5.50kg	770mm x 160mm x 125mm	230-240V ~ 50hz 30 watts

IMPORTANT SAFETY NOTES

- All installation and electrical connection works should be carried out in accordance with all applicable National and Local Building Code Regulations pertaining to the country of installation.
- All installation and electrical connection work must be carried out by suitably qualified professional person(s).
- The Dura-Lite should be connected to the electrical supply with the correctly sized cables.

INSTALLATION NOTES FOR DURA-LITES

1. If you are replacing an existing Dura-Lite ensure it has been professionally disconnected by electrician before removing it.
2. Ensure the location chosen can support the weight of the Dura-Lite before installation.
3. Mark where fixings are to be placed, ensure Dura-Lite is level and pre-drill holes. Attach the cradle to the correct position using the sleeve anchor fixings supplied. (see photo 1 over page)
4. Attach stainless steel wire to both hooks on gear tray and main shell to free float for electrician. (see photo 2 over page)
5. Electrician to connect the wiring of the Dura-Lite to building code regulations.
6. Attach the light to the cradle with the rivets supplied. (see photo 3 over page)
7. Seal(non-pick) the light when completed if installed in a institutional environment

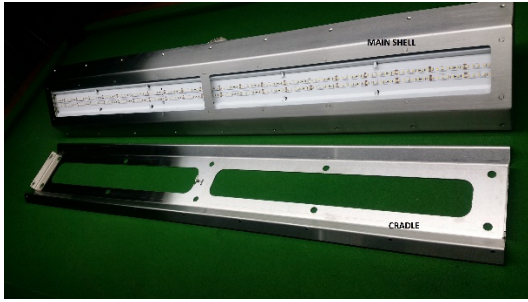

Two parts of Dura-Lite



Photo 1

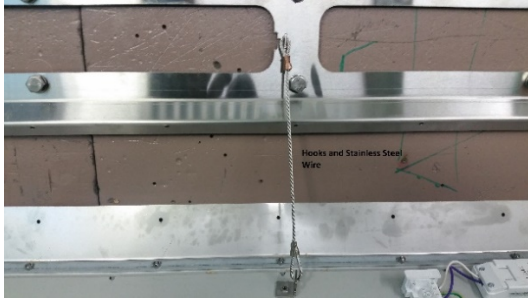


Photo 2



Photo 3

CUSTOMER SERVICE

For technical or customer service, call 06 842 1073 or email us at sales@sharpedge.co.nz

